

DPT3V Calibration Procedure -50 to +200°C

1. Connect a precise resistor decade using three-wire connection to the Pt100 input terminals.
2. Put the resistance to 90.00Ω.
3. Make a short circuit as it is shown on the Figure 1 and wait until two dots appear on the display.

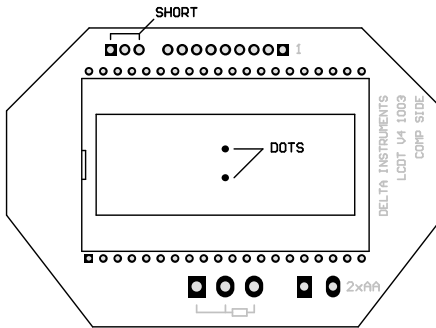


Figure 1.

4. Put the resistance to 170.00Ω.
5. Make a short circuit as it is shown on the Figure 2 and wait until two dots appear on the display.

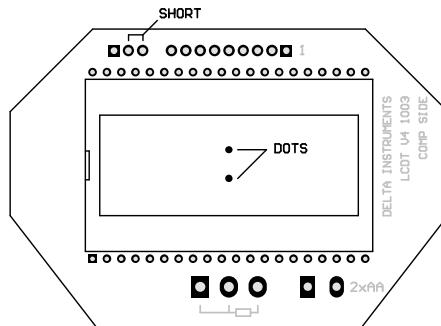


Figure 2