


FINETEK ROTARY PADDLE SWITCHES

SE 180C
 CROSS HAIR PADDLE (PLASTIC)
 3/4" BSPP PROCESS CONNECTION
 SUPPLY VOLTAGE 240 V AC
 CONTACT RATING 250 V AC
 1 AMP SPDT
 ROTARY SPEED = 1 RPM
 OPERATING TEMP -20 TO 60C

CROSS HAIR PADDLE (PLASTIC)
 (BOTTOM VIEW) +

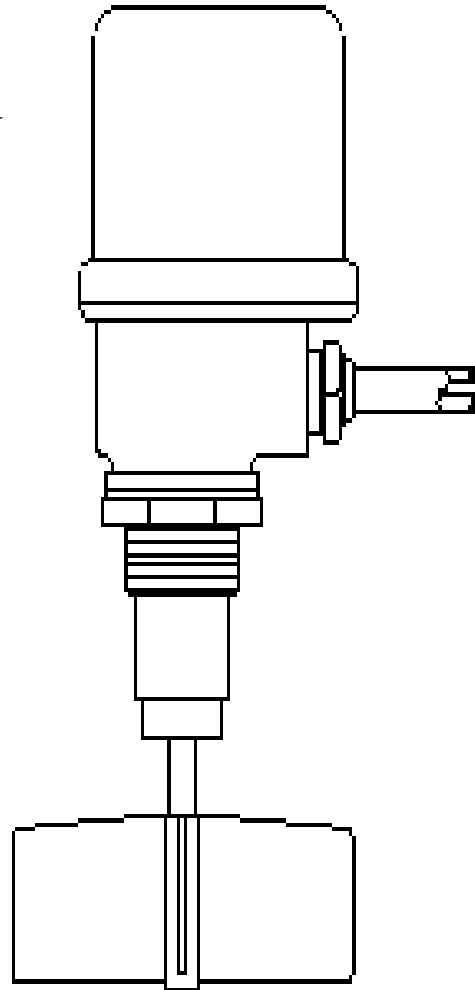

SE 110C
 STRAIGHT PADDLE (METAL)
 1" BSPP PROCESS CONNECTION
 SUPPLY VOLTAGE 240 V AC
 CONTACT RATING 250 V AC
 1 AMP SPDT
 OPERATING TEMP -20 TO 60C

STRAIGHT PADDLE (METAL)
 (BOTTOM VIEW) —

TEMPERATURE CONTROLS PTY LTD		Certificate No: QEC 14412 AS/NZS 9001:2000
CONDITIONS THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST	SYDNEY : 7 YAMMA ST SEFTON , NSW 2162 PHONE : (02) 9721 8644 FAX : (02) 9738 9339	
	MELBOURNE : 8/280 WHITEHALL ST YARRAVILLE VIC 3013 PHONE : (03) 9687 0000 FAX : (03) 9687 1900 EMAIL : sales@temperature.com.au	
	TITLE	
	SIZE : A4	DATE : 16/08/12
SCALE : NTS	DRAWING BY R.B	REV : 01

