



STANDARD - NO or NC CONTACT RATED AT 32V AC/DC @ 500mA RESISTIVE LOAD


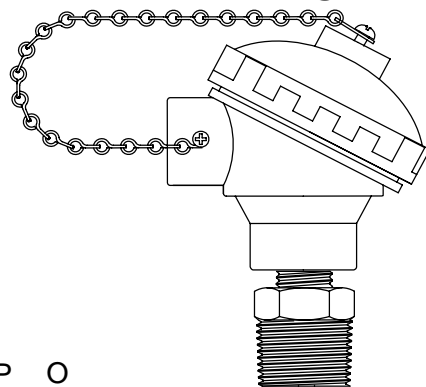


LARGE ALUMINUM HEAD IP65 AND TERMINAL BLOCK



COMMON WIRED CONTACTS

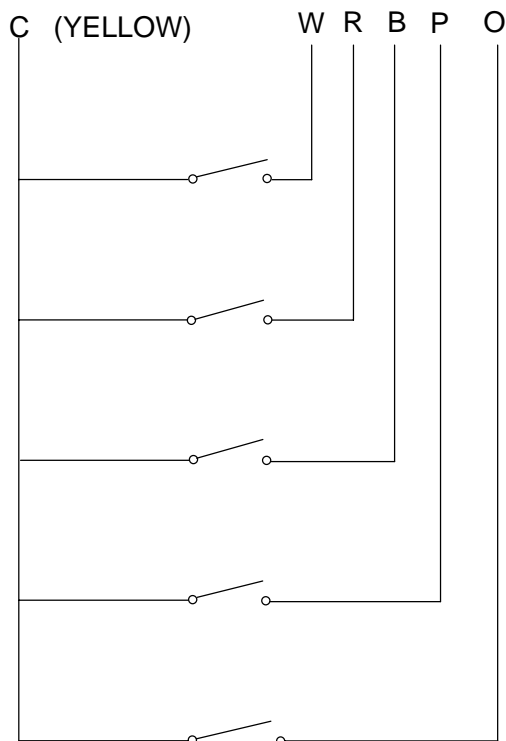

INDIVIDUALLY WIRED CONTACTS

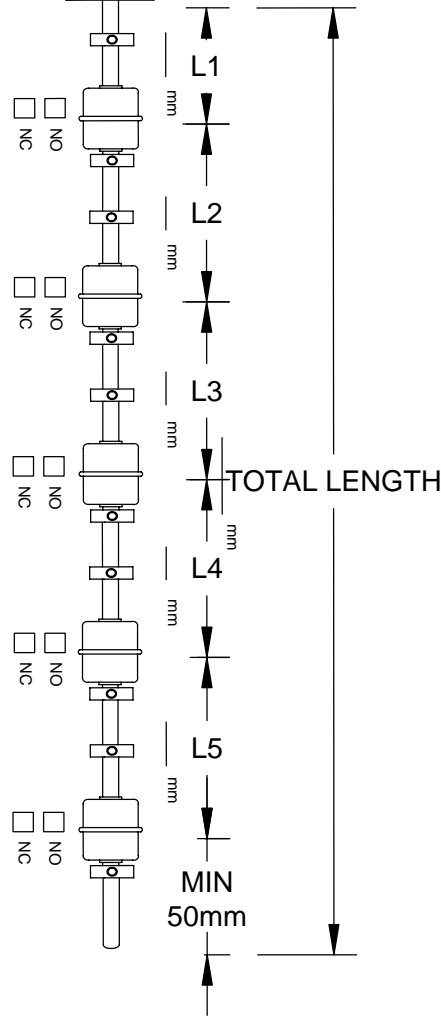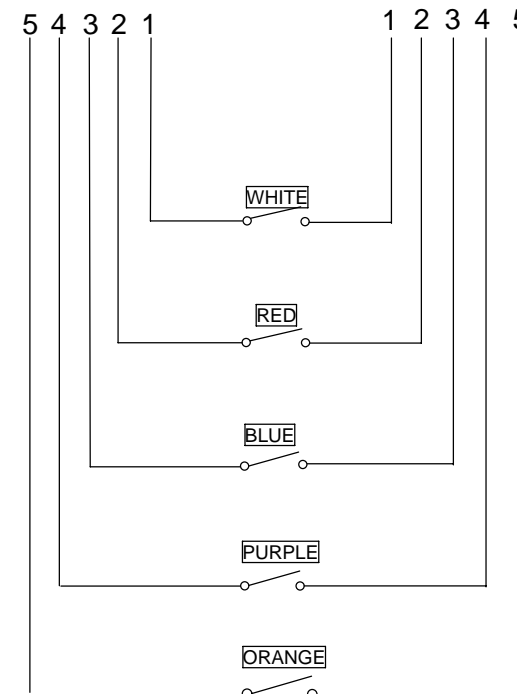

PLEASE SPECIFY N/O OR N/C



NOTE : MINIMUM DISTANCE BETWEEN FLOATS IS 50mm

TEMPERATURE CONTROLS PTY LTD

Certificate No: QEC 14412
AS/NZS 9001:2000

CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162
PHONE : (02) 9721 8644 FAX : (02) 9738 9339
MELBOURNE : 8/280 WHITEHALL ST
YARRAVILLE VIC 3013
PHONE : (03) 9687 0000 FAX : (03) 9687 1900
EMAIL : sales@temperature.com.au



TITLE

| | | |
|-------------|-----------------|------------------------|
| SIZE : A4 | DATE : 12/11/08 | DWG NO : SD 561 |
| SCALE : NTS | DRAWING BY K.F | REV : 01 |