

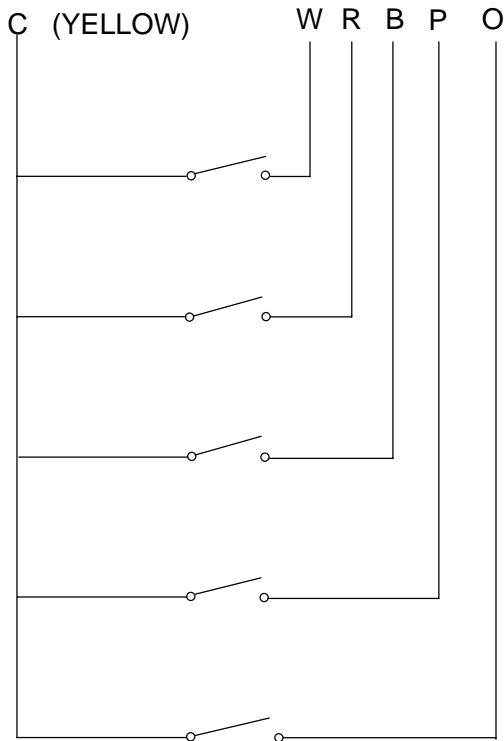



STANDARD - NO, NC or CHANGE OVER CONTACT RATED AT 32V AC/DC @ 500mA RESISTIVE LOAD

COMMON WIRED CONTACTS




PLEASE SPECIFY NO, NC or CHANGE OVER CONTACT




NOTE : MINIMUM DISTANCE BETWEEN FLOATS IS 75mm


LARGE ALUMINUM HEAD IP65 AND TERMINAL BLOCK

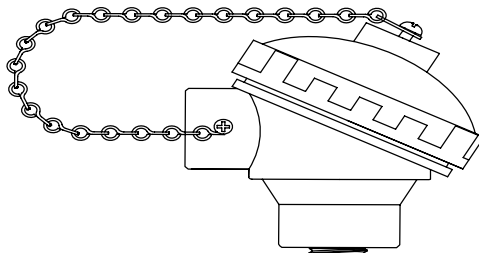


2" BSPT STAINLESS STEEL PROCESS CONNECTION

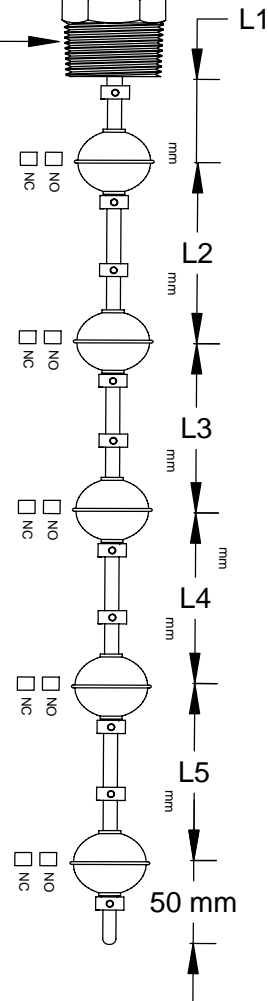

FLOAT DIMENSIONS



INDIVIDUALLY WIRED CONTACTS

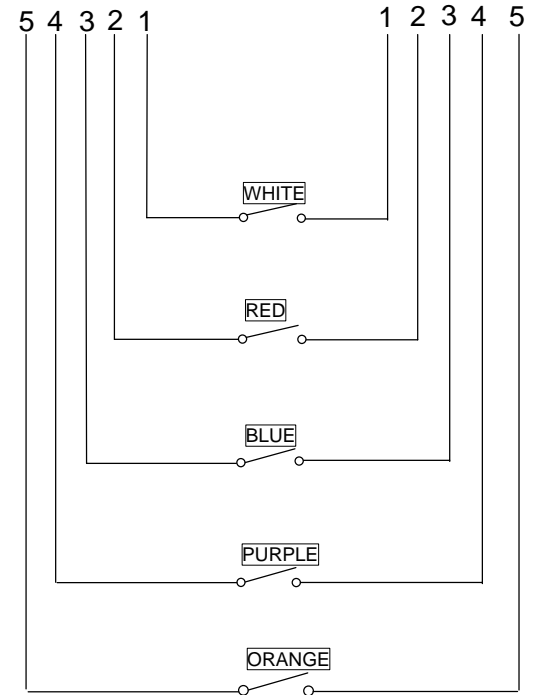

TEMPERATURE CONTROLS PTY LTD

Certificate No: QEC 14412
AS/NZS 9001:2000

CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162
PHONE : (02) 9721 8644 FAX : (02) 9738 9339
MELBOURNE : 8/280 WHITEHALL ST
YARRAVILLE VIC 3013
PHONE : (03) 9687 0000 FAX : (03) 9687 1900
EMAIL : sales@temperature.com.au



TITLE

SIZE : A4

DATE : 06/12/12

DWG NO : SD 597

SCALE : NTS

DRAWING BY R.B

REV : 02