


- STANDARD - NO or NC CONTACT RATED AT 32V AC/DC @ 500mA RESISTIVE LOAD
- CHANGE OVER CONTACT

FLOAT DIMENSIONS

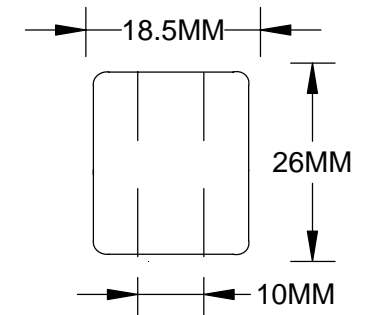

PROCESS CAPABILITIES - SUITABLE FOR DIESEL

- STAINLESS STEEL / NBR PLASTIC CONSTRUCTION / BRASS COLLARS
- UP TO 5 FLOATS PER ASSEMBLY MAXIMUM LENGTH 1800mm
- INDIVIDUAL OR COMMON CIRCUIT WIRING
- SPECIAL THREADS AND LENGTHS AVAILABLE
- SPECIFIC GRAVITY 0.5
- TEMPERATURE RATING 100'C MAXIMUM
- PRESSURE RATING :ATM means atmosphere pressure. Pressure rating is atmosphere pressure. i.e. cannot be used in pressurized environment
- SCREW IN MULTI -LEVEL ASSEMBLY
- 18.5mm DIAMETER NBR PLASTIC FLOAT

TEMPERATURE CONTROLS PTY LTD

QUALITY ENDORSED COMPANY
Certificate No: QEC 14412
AS/NZS 9001:2008

CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY: 7 YAMMA ST SEFTON NSW 2162
PHONE: (02) 9721 8644 FAX: (02) 9738 9339
MELBOURNE: 8/280 WHITEHALL ST YARRAVILLE VIC 3013
PHONE: (03) 9687 0000 FAX: (03) 9687 1900
BRISBANE: 28A/125 KERRY RD ARCHERFIELD QLD 4108
PHONE: (07) 3373 8424 FAX: (07) 3373 8067
EMAIL: sales@temperature.com.au

TITLE		
SIZE : A4	DATE : 23/09/15	DWG NO : SD 833
SCALE : NTS	DRAWING BY R.B	REV : 03