


Ex de Flame Proof / Ex tD Dust Certified Temperature Assembly Fixed Nipple Connection MODEL No: TC20FIXTA

MATERIAL: ALUMINIUM ALLOY
DEGREE OF PROTECTION : IP66

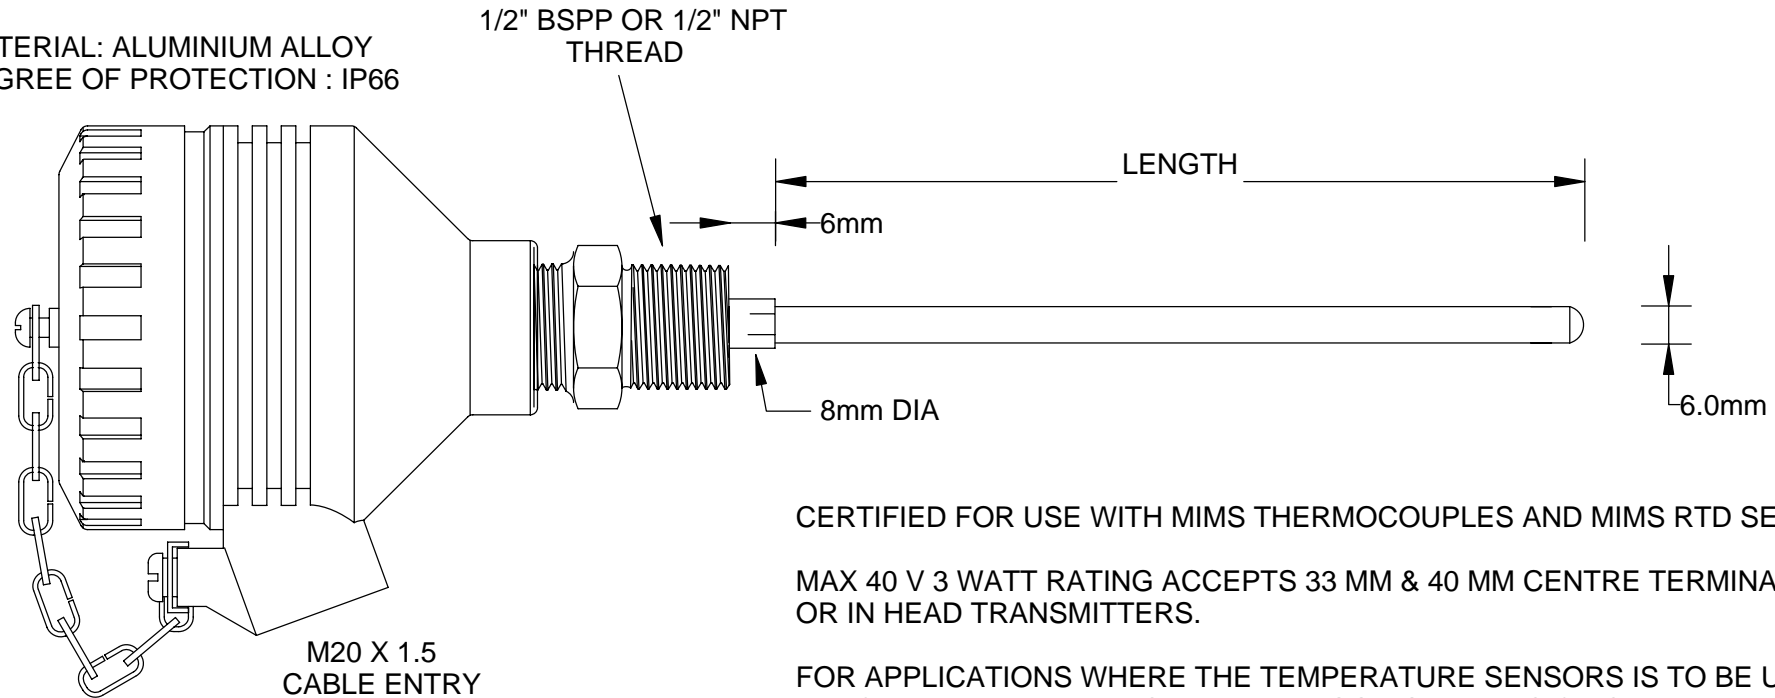

CERTIFIED FOR USE WITH MIMS THERMOCOUPLES AND MIMS RTD SENSORS

MAX 40 V 3 WATT RATING ACCEPTS 33 MM & 40 MM CENTRE TERMINAL BLOCKS
OR IN HEAD TRANSMITTERS.

FOR APPLICATIONS WHERE THE TEMPERATURE SENSORS IS TO BE USED IN
T5 TO T1 TEMPERATURES A 50 MM LAGGING EXTENSION SHALL BE FITTED
TO ENSURE THE ENCLOSURE REMAINS BELOW T6 TEMPERATURE RATING.

IECEX certified Ex de IIC T6 IP66 or Ex tD A21 T6 IP66

IECEX Certificate of Conformance No : IECEX TSA 09.0045X
ISSUE 0 for complete assembly

TEMPERATURE CONTROLS PTY LTD

QUALITY ENDORSED COMPANY
Certificate No: QEC 14412
AS/NZS 9001:2008

CONDITIONS

THIS DRAWING IS OUR
EXCLUSIVE PROPERTY
AND MUST NOT BE
COPIED OR HANDED
TO ANY OTHER PARTIES
WITH OUT WRITTEN
PERMISSION. IT SHALL
BE RETURNED UPON
REQUEST

SYDNEY: 7 YAMMA ST SEFTON , NSW 2162
PHONE: (02) 9721 8644 FAX : (02) 9738 9339
MELBOURNE: 8/280 Whitehall St YARRAVILLE, VIC 3013
PHONE: (03) 9687 0000 FAX : (03) 9687 1900
BRISBANE: 28A/125 Kerry Road, Archerfield Qld 4108
PHONE: (07) 3373 8424 FAX: (07) 3373 8067
EMAIL: sales@temperature.com.au

TITLE **Ex de / Ex tD ASSEMBLY
ALUMINIUM ENCLOSURE**

| | | |
|-------------|-----------------|-----------------------|
| SIZE : A4 | DATE : 01/07/15 | DWG NO : SD569 |
| SCALE : NTS | DRAWING BY R.B | REV : 06 |