



MULTI POINT PROFILE RTD SENSOR

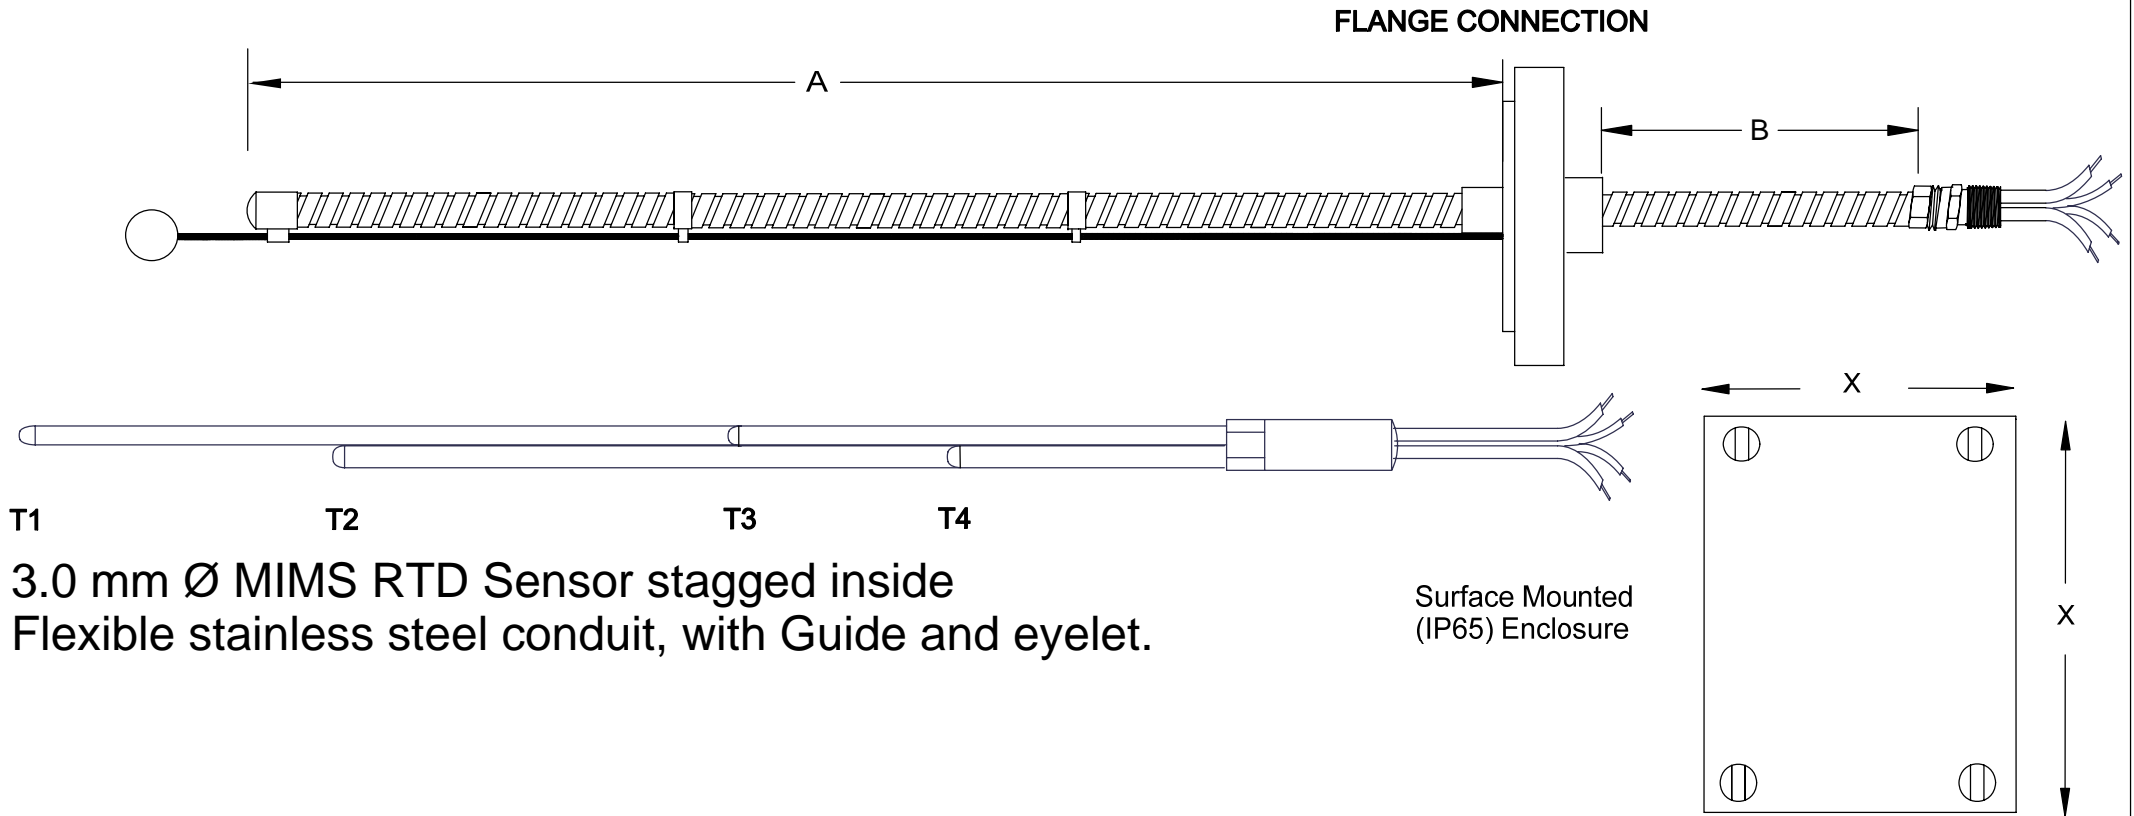

3.0 mm Ø MIMS RTD Sensor staged inside Flexible stainless steel conduit, with Guide and eyelet.

Surface Mounted (IP65) Enclosure

- MULTIPLE 3.0mm DIAMETER 316SS FLEXIBLE MIMS
- STAINLESS STEEL FLEXIBLE CONDUIT**
- STAINLESS STEEL GUIDE WIRE & EYELET
- STAINLESS STEEL FLANGE (SPECIFY)**
- 3 WIRE PT100 OHM, DIN 43760 - IEC 751 CLASS A
- OVERALL LENGTH A = _____**
- NUMBER OF RTD SENSORS = _____**

TEMPERATURE CONTROLS PTY LTD		Certificate No: QEC 14412 AS/NZS 9001:2000	
CONDITIONS		SYDNEY : 7 YAMMA ST SEFTON , NSW 2162 PHONE : (02) 9721 8644 FAX : (02) 9738 9339 MELBOURNE : UNIT 8 / 280 WHITEHALL ST YARRAVILLE VIC 3013 PHONE : (03) 9687 0000 FAX : (03) 9687 1900 EMAIL : sales@temperature.com.au	
THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST			
TITLE			
SIZE : A4	DATE: 08/09/10	DWG NO: SD 814	
SCALE : NTS	DRAWING BY R.B	REV : 00	