


Sensor No	Distance of each Sensor to Bottom of Weight - mm	Total Length of each Sensor - mm
1	840	21820
2	1500	21160
3	2160	20500
4	2820	19840
5	3480	19180
6	4140	18520
7	4800	17860
8	5460	17200
9	6120	16540
10	6780	15880
11	7440	15220
12	8100	14560
13	8760	13900
14	9420	13240
15	10080	12580
16	10740	11920
17	11400	11260
18	12060	10600
19	12720	9940
20	13380	9280
21	14040	8620
22	14700	7960
23	15360	7300
24	16020	6640
25	16680	5980
26	17340	5320
27	18000	4660
28	18660	4000

# THERMAL ENERGY STORAGE TANK - TEMPERATURE ASSEMBLY WATERPROOF TYPE K THERMOCOUPLE ASSEMBLY

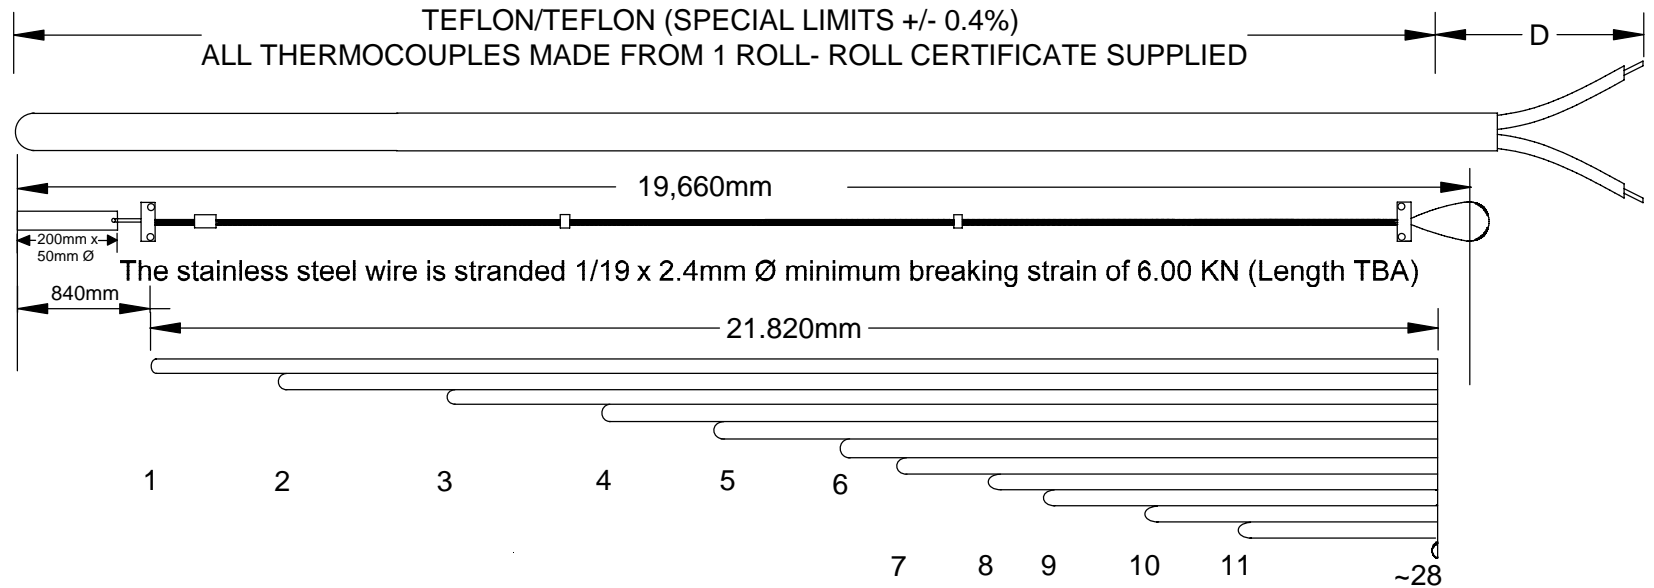

(NOT TO SCALE)

1 ONLY PROFILE THERMOCOUPLE (TCKTT124SL)  
28 ONLY K TYPE THERMOCOUPLES  
ONE EVERY 660 MM  
LONGEST THERMOCOUPLE 21,820mm

**EYELETS 20mm Ø x 30mm LONG**

Type K #TCKTT124 waterproof teflon thermocouples  
Nylon cable ties over protective heat shrink  
Stainless steel support wire with Eyelets  
Cable (D) to continue

316 STAINLESS STEEL WEIGHT  
200mm x 50mm Ø

**TEMPERATURE CONTROLS PTY LTD** Certificate No: QEC 14412  
ISO 9001:2008

**CONDITIONS**

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162  
PHONE : (02) 9721 8644 FAX : (02) 9738 9339  
MELBOURNE : 8/280 Whitehall St  
YARRAVILLE VIC 3013  
PHONE : (03) 9687 0000 FAX : (03) 9687 1900  
EMAIL : sales@temperature.com.au



TITLE

SIZE : A4	DATE : 10/12/12	<b>DWG NO : SD 6044</b>
SCALE : NTS	DRAWING BY R.B	<b>REV : 00</b>