
Ex de / Ex tD Certified Temperature Assembly Fixed Nipple Connection MODEL No: TC20FIXTASS

MATERIAL: 316 S/S

DEGREE OF PROTECTION: IP66

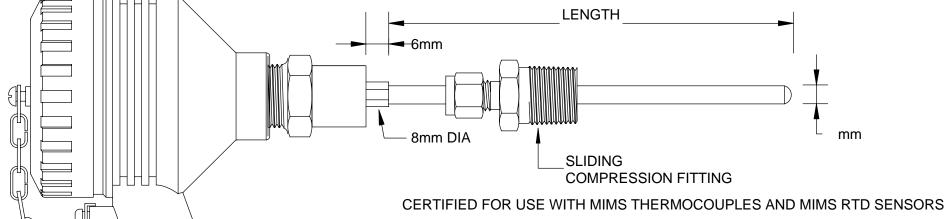

MAX 40 V 3 WATT RATING ACCEPTS 33 MM & 40 MM CENTRE TERMINAL BLOCKS OR IN HEAD TRANSMITTERS.

FOR APPLICATIONS WHERE THE TEMPERATURE SENSOR IS TO BE USED IN T5 TO T1 TEMPERATURES A 50 MM LAGGING EXTENSION SHALL BE FITTED TO ENSURE THE ENCLOSURE REMAINS BELOW TO TEMPERATURE RATING.

IECEx certified Ex de IIC T6 IP66 or Ex tD A21 T6 IP66

IECEx Certificate of Conformance No : IECEx TSA 09.0045X ISSUE 1 for complete assembly

M₂₀ X 1.5 CABLE ENTRY

TEMPERATURE CONTROLS PTY LTD

QUALITY ENDORSED COMPANY Certificate No:QEC 14412 AS/NZS 9001:2008

CONDITIONS

THIS DRAWING IS OUR **EXCLUSIVE PROPERTY** AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON **REQUEST**

PHONE: (02) 9721 8644 FAX: (02) 9738 9339 MELBOURNE: 8/280 WHITEHALL ST YARRAVILLE VIC 3013

PHONE: (03) 9687 0000 FAX: (03) 9687 1900 BRISBANE: 28Á/125 KERRY RD ARCHERFIELD QLD 4108 PHONE: (07) 3373 8424 FAX: (07) 3373 8067

sales@temperature.com.au

TITLE

Ex de / Ex tD ASSEMBLY

DATE: 10/02/16 DWG NO: SD 6098 SIZE: A4 **REV:00** SCALE: NTS DRAWING BY R.B