


IECEX - E x d / Ex tD Fixed Temperature Assembly with 316 Stainless Steel Terminal Head

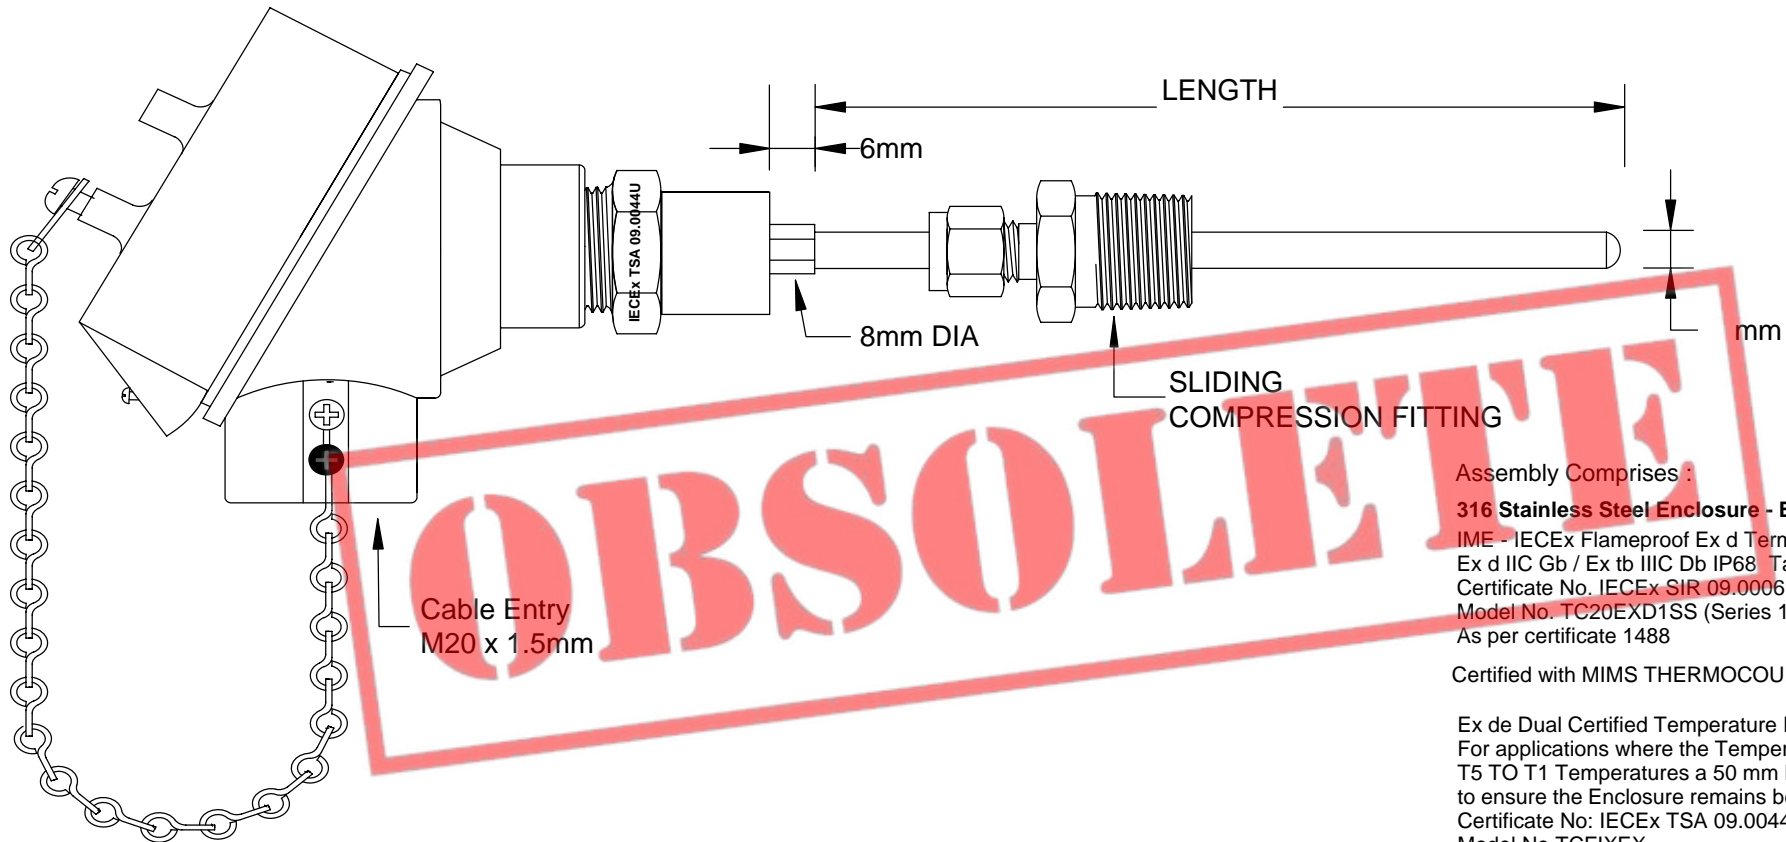

Cable Entry
M20 x 1.5mm

LENGTH

6mm

8mm DIA

SLIDING
COMPRESSION FITTING

mm

Assembly Comprises :

316 Stainless Steel Enclosure - Ex d Flameproof and DIP dust
 IME - IECEX Flameproof Ex d Terminal Head only - Cable entry M20
 Ex d IIC Gb / Ex tb IIC Db IP68 Ta = -40°C to 85°C
 Certificate No. IECEX SIR 09.0006U
 Model No. TC20EXD1SS (Series 1080)
 As per certificate 1488

Certified with MIMS THERMOCOUPLE OR MIMS RTD Sensor

Ex de Dual Certified Temperature Element Fixed Nipple Connection
 For applications where the Temperature sensor is to be used in
 T5 TO T1 Temperatures a 50 mm Lagging Extension shall be fitted
 to ensure the Enclosure remains below T6 Temperature rating.
 Certificate No: IECEX TSA 09.0044U
 Model No TCFIXEX
 As per Certificate 1368

With IECEX SIR 09.0006U (1488) Stainless Steel terminal head
 And IECEX TSA 09.0044U (1368) Thermocouple / RTD

IECEX Dual certified Ex de IIC T6 IP66 or Ex tD A21 T6 IP66

IECEX Certificated of Conformance No : IECEX TSA 09.0044U
 as a component

TEMPERATURE CONTROLS PTY LTD

Certificate No: QEC 14412
 ISO 9001:2008

CONDITIONS

THIS DRAWING IS OUR
 EXCLUSIVE PROPERTY
 AND MUST NOT BE
 COPIED OR HANDED
 TO ANY OTHER PARTIES
 WITH OUT WRITTEN
 PERMISSION. IT SHALL
 BE RETURNED UPON
 REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162
 PHONE : (02) 9721 8644 FAX : (02) 9738 9339
 MELBOURNE : 8 / 280 WHITEHALL ST
 YARRAVILLE VIC 3013
 PHONE : (03) 9687 00 FAX : (03) 9687 1900
 EMAIL : sales@temperature.com.au



TITLE **316 SS TERMINAL HEAD C/W**
Ex d / Ex tD ASSEMBLY

SIZE : A4 DATE : 11/07/11 **DWG NO : SD 838**

SCALE : NTS DRAWING BY R.B **REV : 01**